

FROM THE RESEARCH &  
DEVELOPMENT LABORATORIES  
OF MOMAR, INC.

## TECHNICAL DATA REPORT

# SafCircuit




Correspondence Address:  
P O Box 2257  
Clareinch  
7740

### Description:

A high purity, rapidly evaporating, non-flammable, contact and circuit board cleaner aerosol. Formulated for removing dirt, grease, oils, dust, condensation and any other type soil collected on electronic equipment.

### Benefits:

- Dries Fast
- Zero Residue
- Non-Flammable
- Safe On Most Plastics
- Non-Corrosive
- V.O.C. Exempt
- EPA SNAP Approved
- 30,000 Volt Dielectric Strength

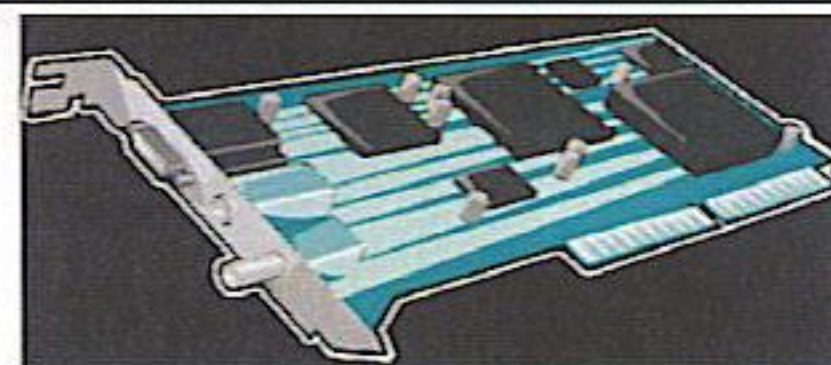

### Safe Plastics

SafCircuit is safe on the following plastics: Neoprene, Buna, Silicone, Butyl Rubber, Natural Rubber, Nylon, Hypalon, PTFE, PVC, Polyurethane, Polystyrene, Polyethylene, Polypropylene, Epoxy, and ABS

### Application:

**Use on:** Circuit boards, wire terminals, relays, switches, contacts, circuit breakers, tuners, potentiometers, cable ends, receptacles, control panels, motors, and other electronic equipment.

**Directions:** Spray directly on to the surface, holding the can close to the surface being cleaned. For hard to reach areas, use the actuator tube. Allow SafCircuit to dry completely before using electronic equipment.

### Specifications:

Net Weight of Aerosol Can	.....	500 gm
Density @ 25°C (ASTM-D-287)	.....	1.55 grams / milliliter
Color (visual)	.....	None
Appearance @ 25°C (visual)	.....	Clear
Solubility in Water	.....	0.033 Percent Weight @25°C
Odor	.....	Faint ether-like odor
Health / Flammability / Reactivity	.....	2 / 0 / 1
Personal Protection	.....	B - Safety Glasses and Gloves

## MOMAR

8 INDULAND CRESCENT, LANSDOWNE CAPE TOWN  
TEL: 021-6921295 FAX: 021-6913898 TOLL FREE: 0800 012053  
EMAIL: orders@momar.co.za